



access units
MOTION 868/433 MHz range

Applicable to doors
roller · folding · sliding · swing · sectional
guillotine · fast · glass · revolving · barriers
posts


FreeT

hands-free system for vehicles
and people



jcmtechnologies
be a step ahead with technology and imagination

The HANDS-FREE system will open all
the doors without you having to press any
control button.

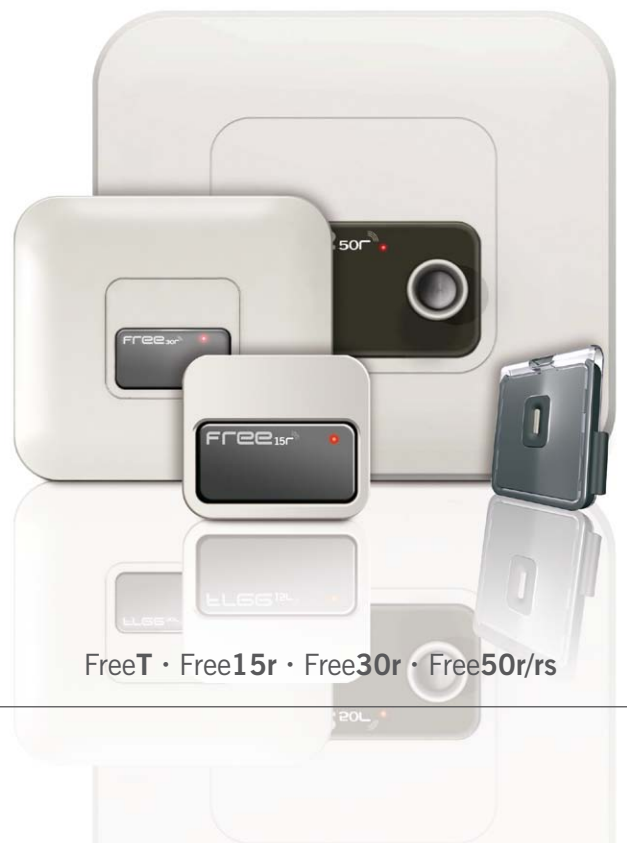

FreeT · Free15r · Free30r · Free50r/rs



TAG	ACCESSORIES
 <h3>FreeT</h3> <ul style="list-style-type: none"> · Nominal range: 100 metros. · Transmission frequency: 868/433 MHz. · Power: 1 x 3Vdc batteries type CR2032. · Batteries last for approximately 2 years. · Acoustic operating indicator for low battery, signal transmission and programming. · Button inlet for voluntary triggering and start-up in the event of automatic disconnection. · Operating temperature -20°C a + 55°C. · ABS plastic case. · Size: 65 x 55 x 10 mm. 	 <p>Tag holder for car dashboards.</p>  <p>Clip.</p>
ANTENNA	
 <h3>Free15r · Free30r</h3> <ul style="list-style-type: none"> · Free15r nominal range: 1.5 metres. · Free30r nominal range: 3 metres. · Transmission frequency: 125 KHz. · Power: 12/24Vac/dc. · LED operations indicator. · Button input for channel and/or group programming. · Pre-wired connection. · Operating temperature -20°C a + 55°C. · ABS IP66 plastic case. · Size of Free30r: 205 x 183 x 14 mm. · Size of Free15r: 87 x 78 x 15 mm.  <h3>Free50r/rs</h3> <ul style="list-style-type: none"> · Triggers with activation input · Free50rs nominal range: 5 metres. · Free50rs nominal range: 5 metres. Fitted with an adjustable presence sensor capable of detecting a moving body from 2.5 to 6.5 metres. · Transmission frequency: 125 KHz. · Power: 230Vac. · LED operations indicator. · Button input for channel and/or group programming. · Pre-wired connection. · Operating temperature -20°C a + 55°C. · ABS IP66 plastic case. · Size of Free50r: 394,4 x 310,5 x 41,6 mm. · Size of Free50rs: 394,4 x 310,5 x 78,7 mm. 	 <p>Wall support Free30r, Free50r y Free50rs.</p>
RECEIVERS	
<p>Receivers MOTION. BASE, WAVE, STICK, CONNECT, ACCESS500, ACCESS1000 and operating panels with built-in receiver.</p>	



ANTENNA

125 KHz - 1,5 - 3 - 5 meters



TAG

868/433 MHz - 100 meters



RECEIVER