




Steuerungsplattform
accessories for control panels

Applicable to doors
roller · folding · sliding · swing · sectional
guillotine · fast · glass


**GTC-R · TLCard
MTC1 · PROGMAN
PLACAEL · PLACAELM**

accessories for control panels

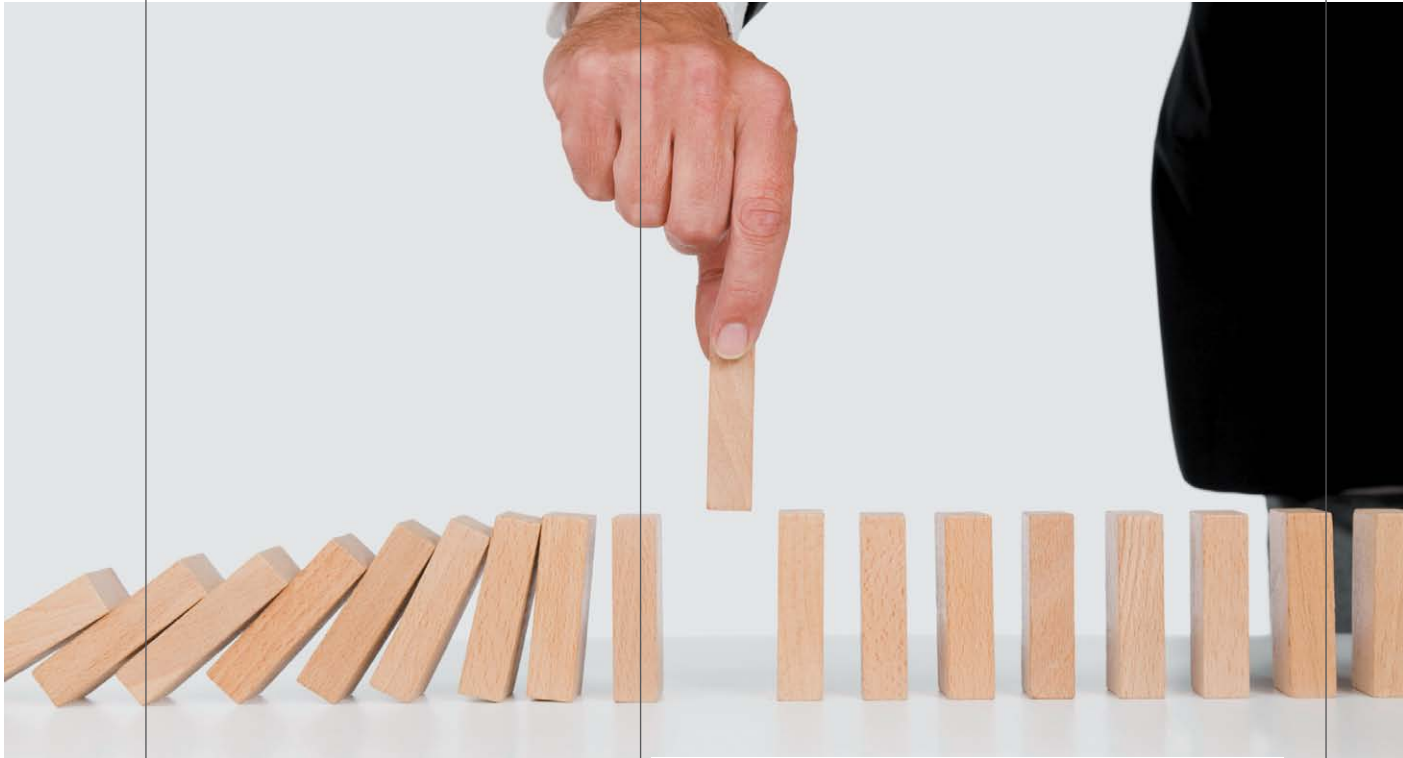

jcmtechnologies
sitúese por delante con tecnología e imaginación

JCM offers a wide range of accessory
devices to increase the features of
your equipment

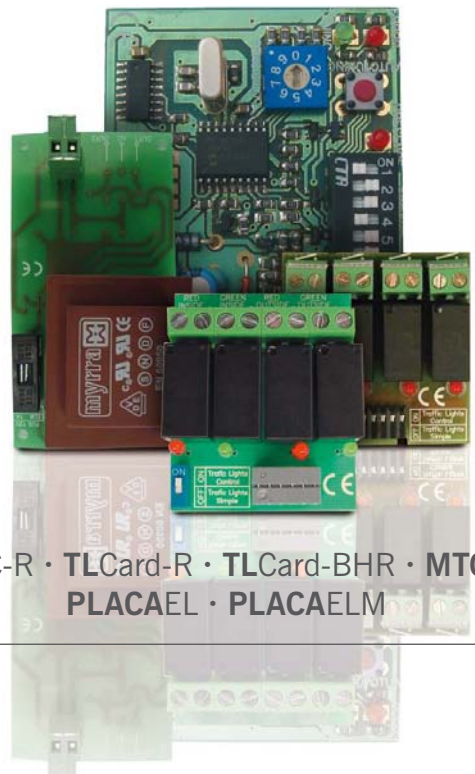

**GTC-R · TLCard-R · TLCard-BHR · MTC1
PLACAEL · PLACAELM**

In line with European standards

A new generation of control panels designed and prepared to meet the requirements of standard EN 13241-1: 2003 for industrial, commercial, garage doors and gates, with special emphasis on Safety in Use of Power Operated Doors as per European Standard EN 12453.

Design

Pleasantly-shaped, waterproof and practical boxes. With space for wiring and motor capacitor.

Versatile panels

An extensive, powerful range of panels for applications in shops, residential garages, large and small communities and industry, etc.

Optimum reliability

The careful selection of components and thorough tests carried out under real conditions of use ensure optimum installation reliability.

Time-saving and greater precision

Digital programming provides faster and more precise adaptation and programming of the panel to suit any type of door. No more than five minutes are required for the entire programming.

ACCESSORIES FOR CONTROL PANELS



GTC-R

- Signal card.
- Outlets: 1.
- To connect signal light at 220Vac.



TLCard-R

- Traffic light card with traffic control (depending on operating panel) and/or signalling control.
- Outlets: 4.
- Allows for the switching of all outlets at 24Vac/dc or all at 230Vac.



TLCard-BHR

- Traffic light card with traffic control (depending on operating panel) and/or signalling control.
- Outlets: 4.
- Allows for the indiscriminate switching of the outlets 24Vac/dc or at 230Vac.



MTC1

- 12Vdc power supply (from the panel connector).
- 40KHz to 140KHz oscillation frequency.
- 30µH to 250µH loop inductance.
- Possible no. of loops connected: 1.
- -20 °C to +85 °C operating temperature (up to 98%Rh).
- Dimensions: 60 x 48 x 17 mm.



PLACAEL

- Optional board to control electric locks on all versions of BASIC+HR operating panels.



PLACAELM

- Optional board to control motorised locks on all versions of BASIC+HR operating panels.